

REVOLUTION




TRU TECH


PRECISION GRINDING SOLUTIONS

Specifications

Maximum Grind Length (Between Centers)	20"	508 mm
Maximum Grind Diameter	10"	254 mm
Maximum Travel	Y Axis	13" 330 mm
	Z Axis	27" 685 mm
Wheel Speed	500 - 2200 RPM	
Standard Wheel Size	16" (max.)	406 mm (max.)
Maximum Velocity	Y Axis	200"/Min 5,000 mm/Min
	Z Axis	200"/Min 5,000 mm/Min
Input Increment	0.00001"	.0001 mm
Repeatability	±0.00004"	±0.001 mm
Wheel Spindle Motor	7.5 HP	5.6 kW
Workhead Motor	2 / 3 HP	.48 / .65 kW
Workhead Taper	A2-5 Face with #5 Morse Taper	
Tailstock Taper	#4 Morse Taper	
Workhead Angle Adjustment (Manual)	±30°	
Table Angle Adjustment (Manual)	±8°	
Power Requirements	380V – 480V, 60 Hz, 30A	
Shipping Dimensions	138" x 90" x 60"	3.5 m x 2.3 m x 1.5 m
Shipping Weight	9000 lb	4090 kg

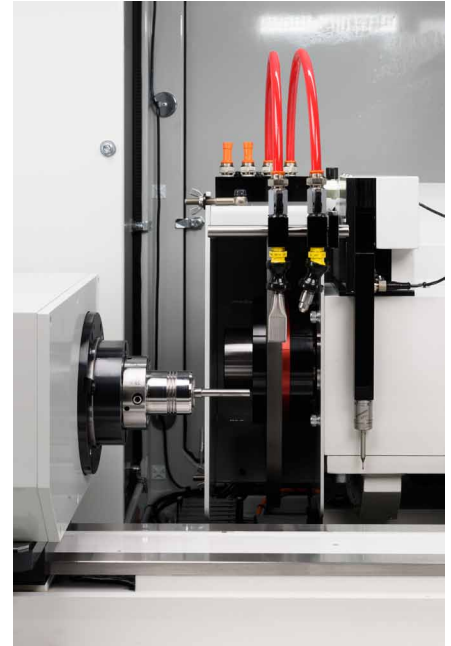

Floor Layout

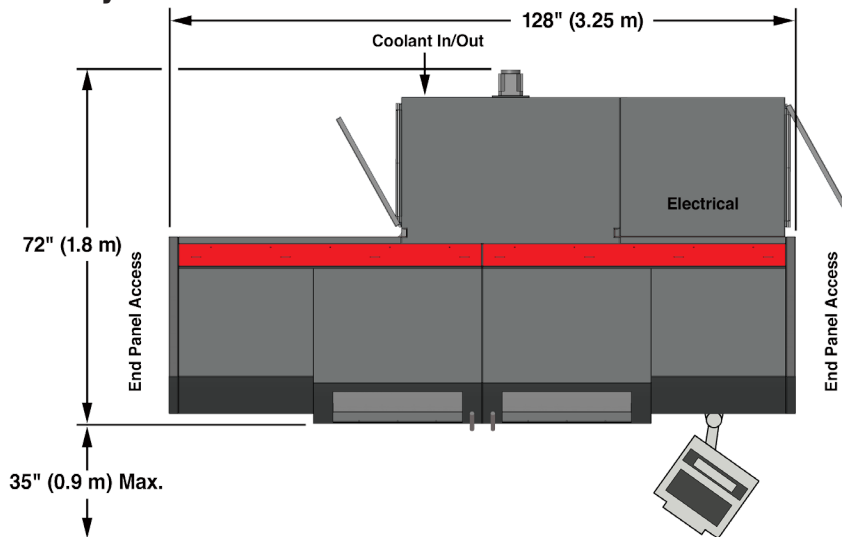

All photographs may include non-standard or optional features. For specific needs, please contact your local Tru Tech Systems distributor, or Tru Tech Systems direct.

Tru Tech Systems, Inc.

Toll Free: (877) TRU-TECH • Phone : 586 469-2700 • Fax: 586 469-1344
 P.O. Box 46965 • Mt. Clemens, MI 48046 • U.S.A. • www.trutechsystems.com